


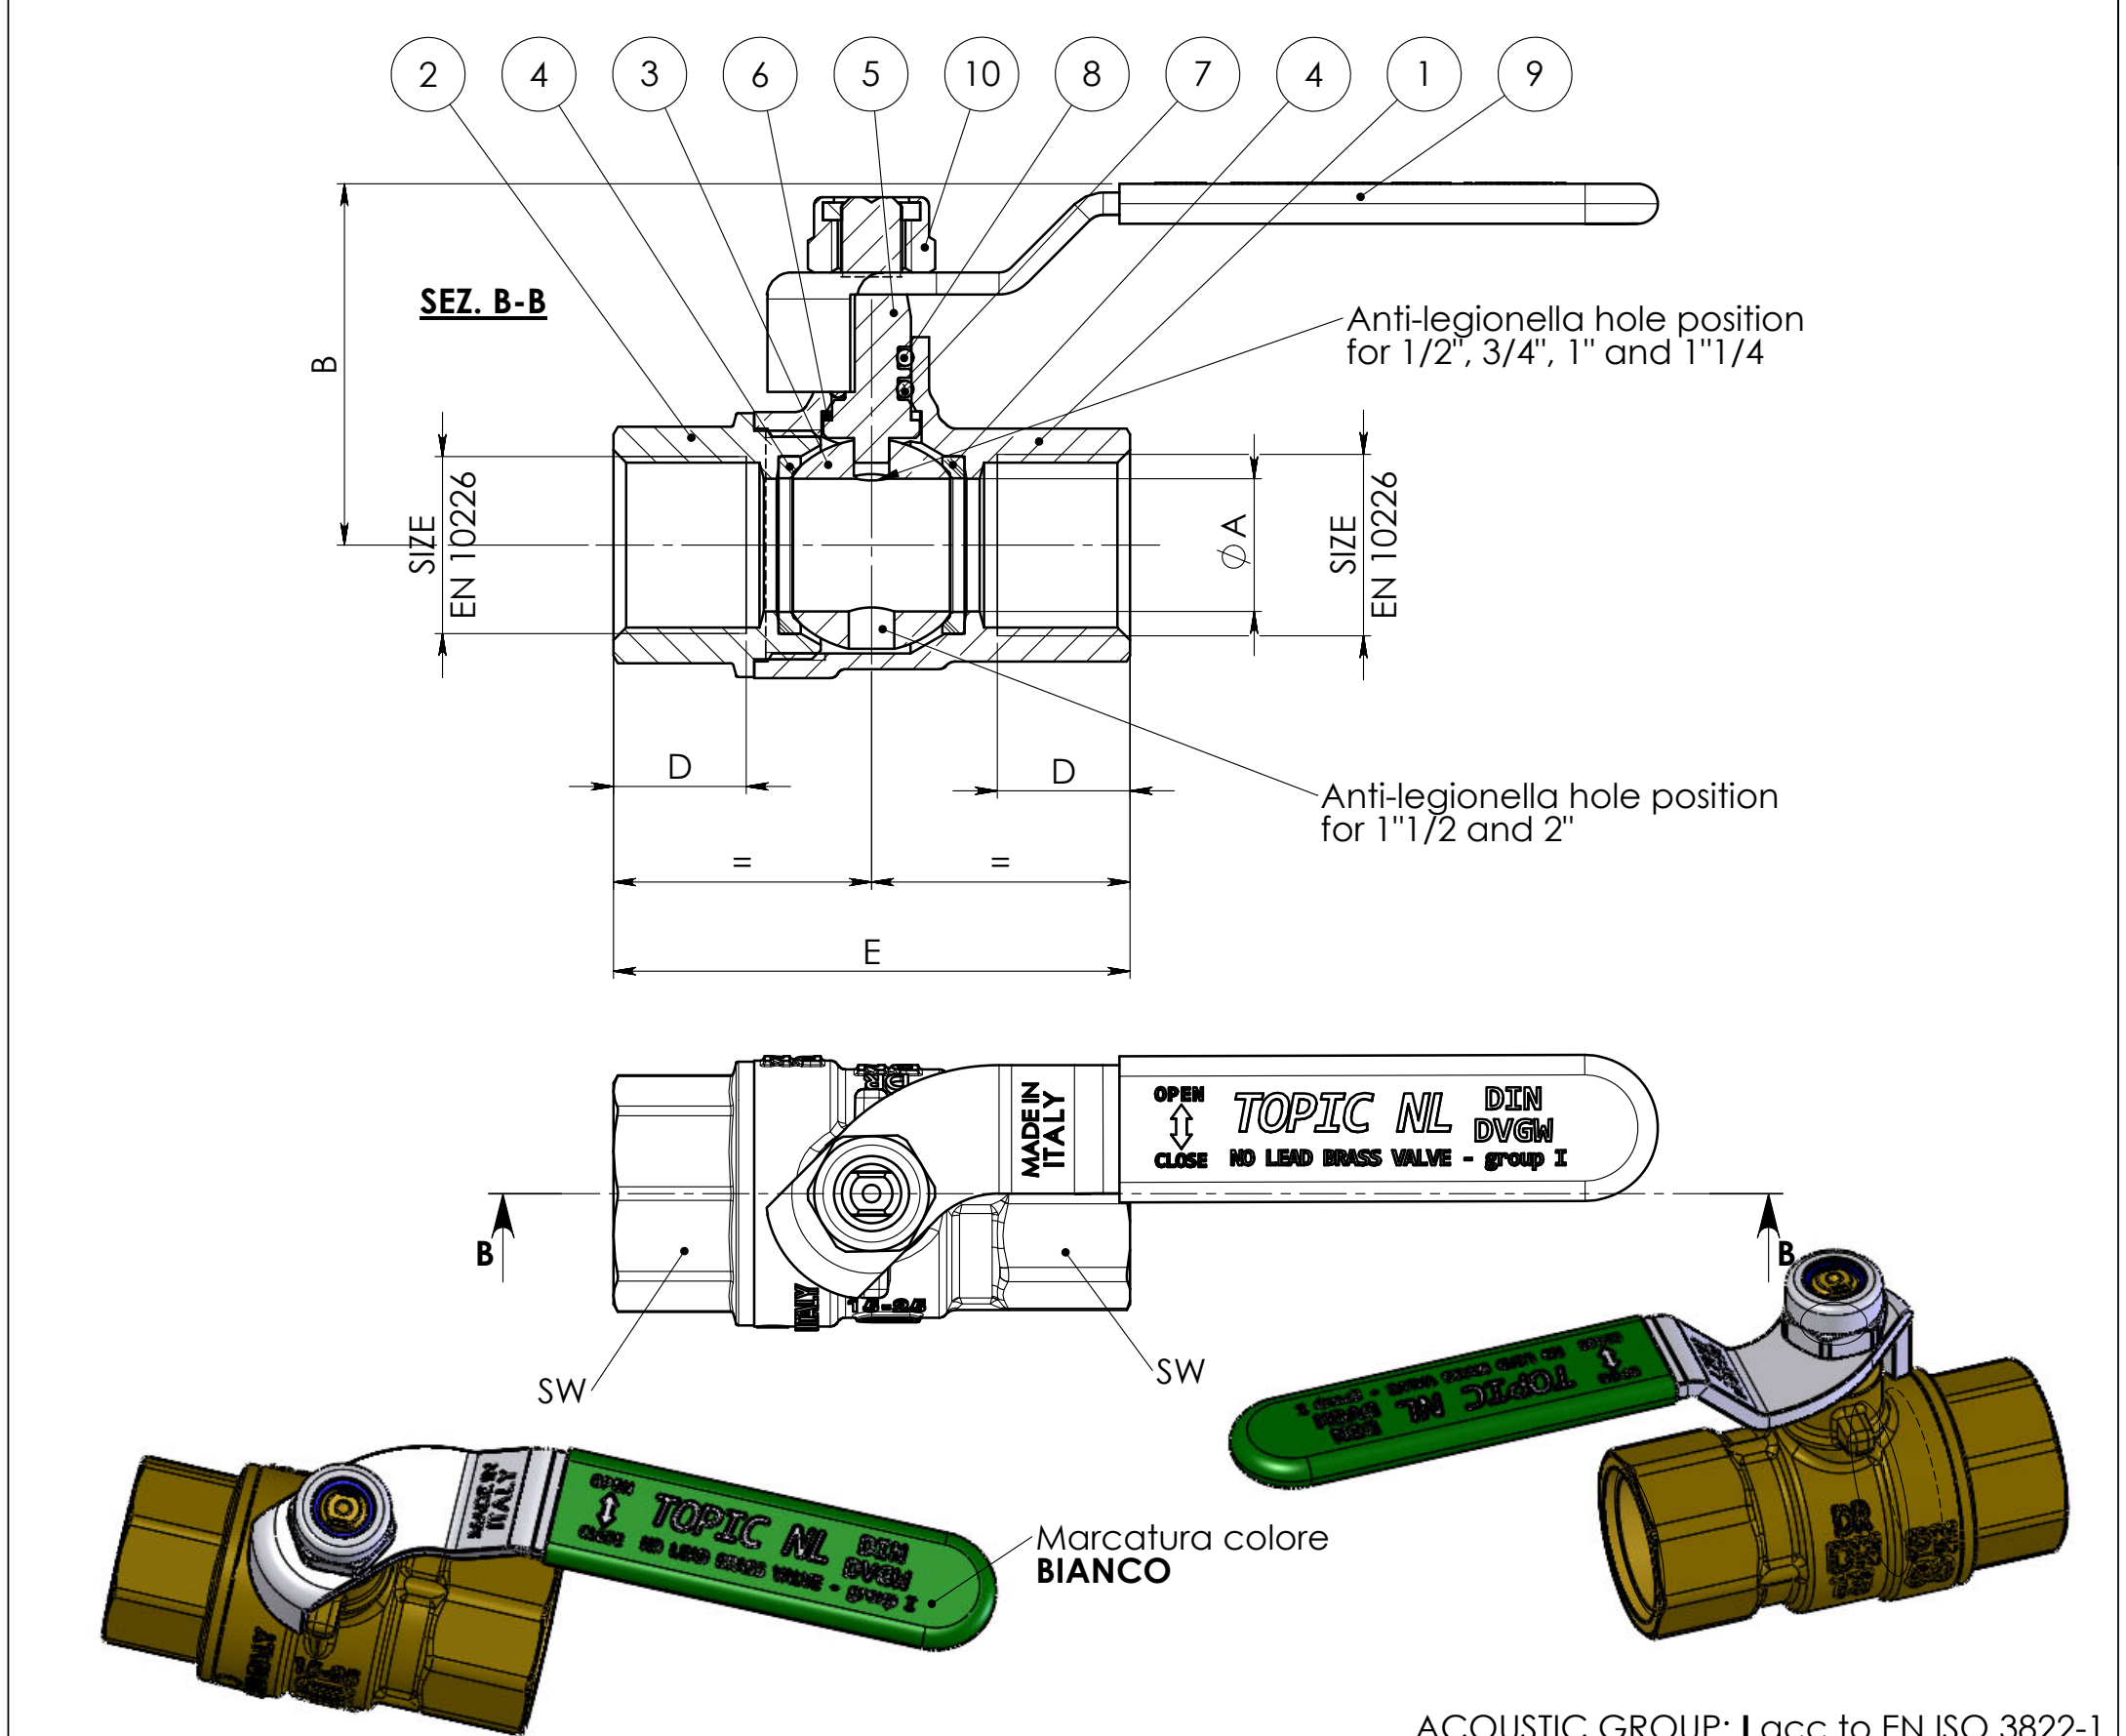


ACOUSTIC GROUP: I acc.to EN ISO 3822-1
DVGW drinking water approval Nr DW-6102DR0304

S1221V39	2"	50	50	83	170	25.7	130									66	40	
S1221V38	1"1/2	40	40	72	140	21.4	108									54	40	
S1221V37	1"1/4	32	32	62	120	21.4	98.5									47	50	
S1221V36	1"	25	25	52	105	19.1	83									38	50	
S1221V35	3/4"	20	20	49.5	105	16.3	70									31	50	
S1221V34	1/2"	15	15	40	90	15	59.5									25	50	
CODICE - CODE	MISURA - SIZE	DN	ØA	B	C	D	E									SW	PN	Sforzo di max. Nm

FEATURES		ASSEMBLY TESTING SPECS	N°	DESCRIPTION	MATERIAL	Q.TY
FLOW DIRECTION	IN THE BOTH WAYS	EGA.004	1	BODY	CW511L Pb0,1% (EGM.106)	1
OPERATION	STEM ROTATION OF 90°	EGA.005	2	END ADAPTER	CW511L Pb0,1% (EGM.106)	1
ENDS	EN10226 - FEMALE THR'D	EGA.009	3	BALL	AISI 304 (EGM.037)	1
LOCKING DEVICE		EGA.064	4	BALL SEAT	PTFE (EGM.009)	2
SEAL	ANAEROBIC SEALANT(EGM.022)		5	STEM	CW510 Pb0,1 (EGM.079)	1
LUBRICANT	SILICON FREE LUBRICANT(EGM.025)		6	THRUST WASHER	PTFE (EGM.009)	1
PRESSURE LIMITS	SEE TABLE	EGA.015	7	O-RING	FKM (EGM.015-EN549-WRAS-NSF61)	1
TEMPERATURE LIMITS	-20°C / +130°C	EGA.016	8	O-RING	EPDM (EGM.071-WRAS-NSF61-TZW-UL157)	1
SERVICES	HOT AND COLD WATER-COMPRESSED AIR-OILS-NON AGGRESSIVE FLUIDS		9	LEVA FERRO	ZINC PLATED STEEL(EGM.007)	1
STANDARD REFERENCES	UNI EN 12164/65 EN13828 EN 3822-1 2014-68-EU(PED) RoHS UBA-List DVGW CERT ZP799		10	SELF-BRAKING NUT	AVP STEEL (EGM.020)	1

General Tolerances: ±1Replaces:Finishing: VariousSeries: TOPICSize: See Table

**ENOLGAS**
CONCESIO Via Europa, 227 ITALY

**CAD DRAWING DO NOT CORRECT DO NOT MODIFY BY HAND**
This drawing must not be used in any manner unless prior written authority is received from ENOLGAS BONOMI s.p.a.

Format: **A3**Date: 18/10/2024Scale:

Description:
NO LEAD DR BALL VALVE - EN
10226 - GREEN STEEL LEVER

Drawn: R. Torcoli
Approved: R. Torcoli
Drawing n°: **S1221V34-39**